

# ENDURAFLOOR WB UV

## SYSTEM DATA SHEET

Water based hybrid epoxy urethane coating meeting green star requirements.



### TECHNICAL SNAPSHOT



#### ABRASION RESISTANCE

Excellent



#### BOND STRENGTH TO CONCRETE

>1.5Mpa



#### DRY HEAT RESISTANCE

120°C



#### VOC

36grams/Litre, conforms to Green Star Design



#### CHEMICAL RESISTANCE

Good - The following chemicals are an example only, based on ambient temperature exposure. Consult A&I for further information and any chemicals not listed below.

- |                                   |                        |
|-----------------------------------|------------------------|
| ■ Hydrochloric Acid<br>10% in H2O | ■ Sulphuric acid 30%   |
| ■ Sodium Hydroxide<br>10% in H2O  | ■ Grease               |
| ■ Motor Oil                       | ■ Acetic acid 5%       |
| ■ Brake Fluid                     | ■ Diesel               |
| ■ Skydrol                         | ■ Hydrocarbon Solvents |
|                                   | ■ Nitric Acid 10%      |

Note: aesthetic staining is not classed as failure. Spills and splashes should be cleaned and removed within 24hrs

### FEATURES & BENEFITS

- 100% UV Stability – can be used externally.
- Variable slip resistant profiles from P2—P4 ratings according to AS4586 2013
- Coloured
- Satin
- Unlimited colour range
- Easy clean
- Good chemical resistance
- Suitable for pedestrian, trolley and rubber wheeled vehicular traffic.
- Low VOC
- Economical and well suited for large areas.
- Self-priming
- Low Odour
- User friendly, easy application by spray, brush or roller.
- Seamless finish



### TYPICAL USES

- Retail Outlets
- Commercial Offices
- Warehouses
- Storage Facilities
- Education
- Back of House facilities
- Amenities
- Walkways & Footpaths
- Museums
- Galleries
- Correctional Facilities
- Supermarkets

# ENDURAFLOOR WB UV

## SYSTEM DATA SHEET

Water based hybrid epoxy urethane coating meeting green star requirements.




## PREP AND SUBSTRATE REQUIREMENTS

- Suitable substrates are concrete, CFC and mineral based substrates.
- Substrate to be min 25Mpa compressive strength and 1.5Mpa pull off value.
- Substrate must be free of rising moisture and must have an effective damp proof membrane beneath.
- Substrate moisture content must be below 4% PBW.
- Surface must be sound, dry, free from all loose material, laitance, old coatings, dust and surface contaminants (e.g. oil, grease, chemicals, release/curing agents etc.).
- Concrete must be suitably keyed to ensure good coating adhesion. This can be achieved by diamond grinding to minimum ICRI CSP 2.
- Remove all loose matter through vacuum cleaning.

## ATMOSPHERIC REQUIREMENTS

- Substrate surface temperature to be 3°C above dew point during installation and initial set
- Below 85% RH
- Application temperature between 10 – 30°C

## SYSTEM BUILD UP refer to individual product sheets for detailed product information.

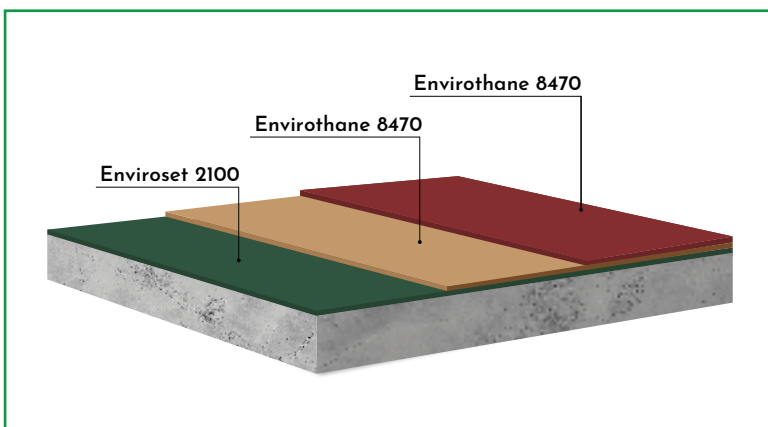

## APPLICATION:

- 1/ Apply 1 coat of Enviroset 2100 satin at 7-8m<sup>2</sup>/L. Follow application guidance and intercoat times as listed on TDS.
- 2/ Apply 2 coats of Envirothane 8470 at 7-8m<sup>2</sup>/L. For each coat.

Follow directives and installation instructions and intercoat timelines as listed in each TDS.

Slip resistant grit can be included to achieve slip ratings as desired - contact A&I coatings for further information.

## CURING TIMES

- Pedestrian traffic: 24hrs at 22°C at 60% humidity.
- Vehicle Traffic: 72hrs at 22°C at 60% humidity.
- Full cure: 7 days at 22°C at 60% humidity.
- Curing times are subject to change depending on the ambient temperature.
- Ensure no water contact for at least 3 days.

# ENDURAFLOOR WB UV

## SYSTEM DATA SHEET

Water based hybrid epoxy urethane coating meeting green star requirements.



### FOR SPECIFIERS

#### SPECIFY:

“Floor coating system to be Endurafloor WB UV as supplied by A&I Coatings PTY LTD”

OPTIONS	Slip Rating	Colour	Finish
	Select from P2 – P4 as required	Choose from standard colours or any AS 2700 Colour	Satin

#### STANDARD COLOURS:



### IMPORTANT NOTES

- For consistent colouration, ensure the colour is from the same batch over the course of the project.
- Any expansion joints must be reflected through the system and filled with a flexible joint sealer after system application.
- Any dynamic crack movement may transfer through the floor system and result in a visual crack on the surface.
- Certain colours such as whites, bright colours may require additional coats to achieve coverage. Consult with A&I for further information.
- The coverage rates listed above on this system data sheet can vary depending on the quality of the substrate. Conduct site tests to verify.