

ENDUR FLOOR RC ESD

SYSTEM DATA SHEET

Heavy duty solvent free electrostatic dissipative epoxy



TECHNICAL SNAPSHOT



HARDNESS

Shore D >75



ELECTRICAL RESISTANCE

<10⁹ Ohms RG, IEC 61340-4-1



BOND STRENGTH TO CONCRETE

>1.5Mpa



DRY HEAT RESISTANCE

120°C



VOC

<100grams/Litre, conforms to Green Star Design



FIRE RESISTANCE

(kWm²)=> 11



SMOKE VALUE %

4



CHEMICAL RESISTANCE

Good - The following chemicals are an example only, based on ambient temperature exposure. Consult A&I for further information and any chemicals not listed below.

- | | |
|--|------------------------|
| ■ Sodium Hydroxide 10% in H ₂ O | ■ Sulphuric acid |
| ■ Motor Oil | ■ Grease |
| ■ Brake Fluid | ■ Acetic acid 5% |
| ■ Skydrol | ■ Diesel |
| | ■ Hydrocarbon Solvents |

FEATURES & BENEFITS

- Silica free system
- BIO epoxy-uses recycled oils and BIO fuel waste.
- Easy clean
- High chemical resistance
- Suitable for pedestrian, vehicular and forklift traffic
- Low VOC
- Critical radiant flux certified
- Economic and well suited for large areas
- Easy installation
- Light reflectivity
- Seamless Finish



TYPICAL USES

- | | |
|----------------------|---------------------------------|
| ■ EPA zones | ■ Electronic Industries |
| ■ AGV traffic | ■ Aerosol production facilities |
| ■ Chemical storage | ■ Chemical storage |
| ■ Aircraft Hangars | ■ Data centres |
| ■ Defence Facilities | |

Note: Aesthetic staining is not classed as failure. Spills and splashes should be cleaned and removed within 24hrs.


PREP AND SUBSTRATE REQUIREMENTS

- Suitable substrates are concrete, CFC and mineral based substrates.
- Substrate to be min 25Mpa compressive strength and 1.5mpa pull off value.
- Substrate must be free of rising moisture and must have an effective damp proof membrane -Substrate moisture content must be below 4% pbw.
- Surface must be sound, dry, free from all loose material, laitance, old coatings, dust and surface contaminants (e.g. oil, grease, chemicals, release/curing agents etc.).
- Concrete must be suitably keyed to ensure good coating adhesion. This can be achieved by diamond grinding to minimum ICRI CSP 2.
- Remove all loose matter through vacuum cleaning.

ATMOSPHERIC REQUIREMENTS

- Substrate surface temperature to be 3°C above dew point during installation and initial set.
- Application temperature between 10 – 30°C
- Below 85% RH

SYSTEM BUILD UP refer to individual product sheets for detailed product information.

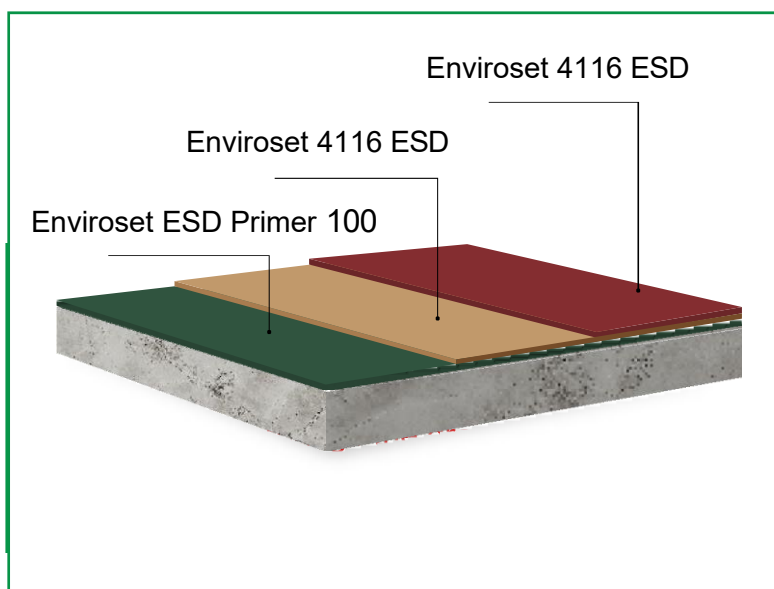

APPLICATION:

Application by roller as a 3coat system as follows

- 1st Coat - Enviroset ESD Primer 100 at 6-7m²/L
- 2nd Coat - Enviroset 4116 ESD at 6-7m²/L
- 3rd Coat if required Enviroset 4116 ESD at 6-7m²/L).

Follow directives and installation instructions and intercoat timelines as listed in each TDS.

CURING TIMES

- Pedestrian traffic: 24hrs at 22°C
- Vehicle Traffic: 72hrs at 22°C
- Full cure: 7 days at 22°C
- Curing times are subject to change depending on the ambient temperature.
- Ensure no water contact for at least 5 days.

FOR SPECIFIERS

SPECIFY:

"Floor coating system to be Endurafloor RC ESD as supplied by A&I Coatings PTY LTD"

OPTIONS	Slip Rating	Colour	Finish
	Select from P1 – P5 slip resistance depending on requirement	2 standard colours.	Gloss

STANDARD COLOURS:



IMPORTANT NOTES

- For consistent colouration, ensure the colour is from the same batch over the course of the project.
- Any expansion joints must be reflected through the system and filled with a flexible joint sealer after system application.
- Any dynamic crack movement may transfer through the floor system and result in a visual crack on the surface.
- The coverage rates listed above on this system data sheet can vary depending on the quality of the substrate. Conduct site tests to verify.
- Proper ESD footwear or straps to equipment must be used to ensure proper grounding and dissipation of electric charge to earth points.
- This system requires earthing points to be installed at a minimum of 2 per room and every 100m2 surface area. No earthing points to be more than 10 metres apart. Consult A&I Coatings for project specific instructions. Consideration is to be given to separate floor slabs and movement joints, incorporating correct detailing to ensure electrical continuity.